


| | |
|-------------------------------|---------------------------------------|
| Type Designation | 4914 |
| Designation IEC | LR14 |
| System | Zn-MnO ₂ (Alkaline) |
| Shelf Life (Coding)* | 5 years |
| Nominal Voltage [V] | 1.5 |
| Typical Capacity C [mAh] | 7800 (discharge with high-resistance) |
| Permissible Temperature Range | -10 °C ... 50 °C |
| Weight, approx. [g] | 66 |
| Volume [ccm] | 26.5 |

| | | |
|-----------------|------|------|
| Dimensions [mm] | min: | max: |
| Ø | 24.9 | 26.2 |
| A | - | 50.0 |
| B | 48.6 | - |
| C | 13.0 | - |
| E | - | 0.9 |
| F | - | 7.5 |
| G | 1.5 | - |

Discharge Type:

4M/H, 8 H/D, 7 D/W
Portable Lighting


Load: 3,9 Ohm

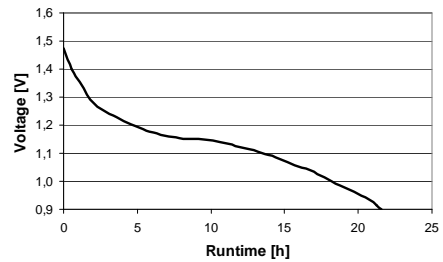

Discharge Type:

2 H/D, 7 D/W
Portable Stereo

Load: 400 mA

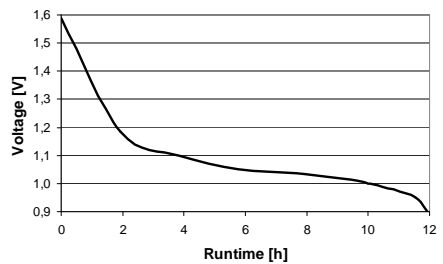

Discharge Type:

4 H/D, 7 D/W
Radio

Load: 20 Ohm

